



FITTING INSTRUCTIONS FOR LS0008BK LOCKSTOP SAVERS
DUCATI PANIGALE V4, V4S, SPECIALE '18-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY).

KIT CONTENTS

- Lockstop saver mounting plate (MP0213) (x2)
 - Lockstop saver bobbin (B0486) (x4)
 - Spacer (S1109) (x4)
- M5 x 20mm long button head bolt (x4)

TOOLS REQUIRED


- 3mm Allen Key
- 4mm Allen Key



Picture 1



Picture 2

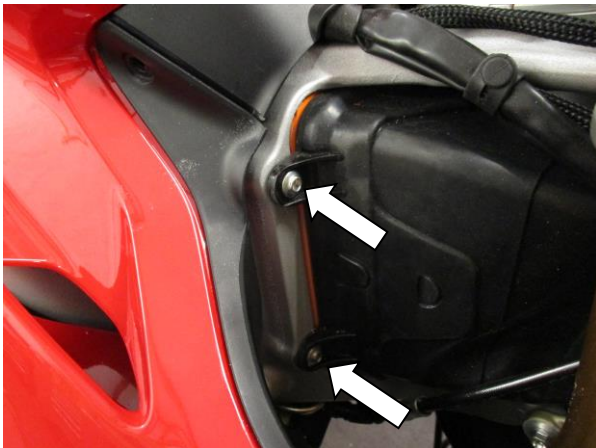

Picture 2



Picture 2

FITTING INSTRUCTIONS

- Assemble the bobbins to the mounting plates by pressing them into the slots as shown in picture 1.
- Place a bolt through both mounting plate holes as shown in picture 1 ensuring that the bolt goes through the side with the greater angle as shown in picture 2. Place a spacer on the opposite side of the mounting plate as shown in pictures 2 and 3.
- Remove the 2 bolts arrowed in picture 1.
- Use the M5 bolts to secure the lockstop saver assembly in place as shown in picture 4.
- Repeat for both sides.
- Do not overtighten the bolts, a maximum torque setting of 12Nm is advised for the supplied M5 bolts.
- Regularly check to ensure lockstop saver remains tight.

ISSUE 1 20/02/2018 (HB)

ISSUE 2 14/03/2018 (HB)

Digital copies of these instructions are available to download from www.rg-racing.com

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com